


PUSH BUTTON INTERFACE

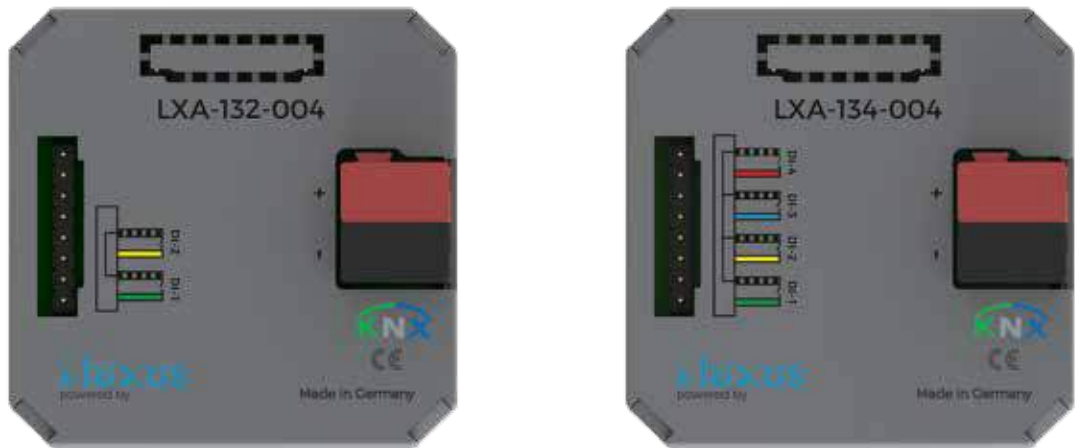


2 Gang

4 Gang


GENERAL FEATURES

- ▶ 2 (LXA-132-004) or 4 (LXA-134-004) functional input channels
- ▶ Easy connection with colorful connection cables
- ▶ Possibility to incorporate dry contact data into the KNX line
- ▶ Switching, scene, counter, send value, shutter/blind and dimming operations
- ▶ Long press operation

CONNECTION DIAGRAM

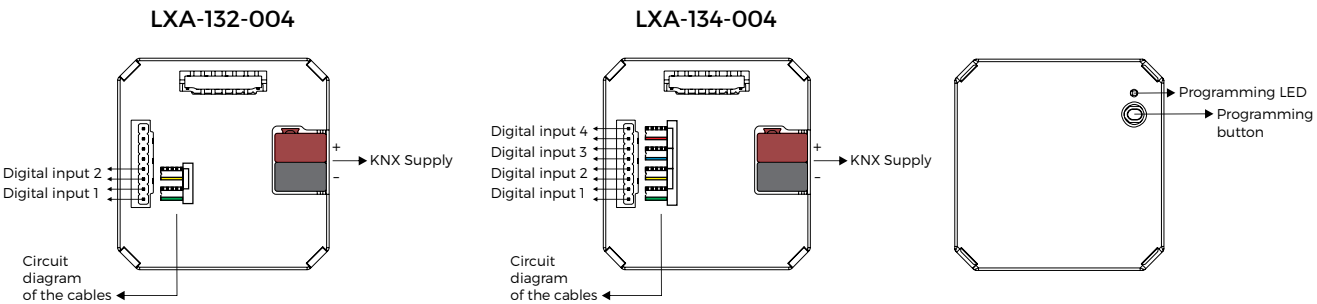

SCALE DRAWINGS

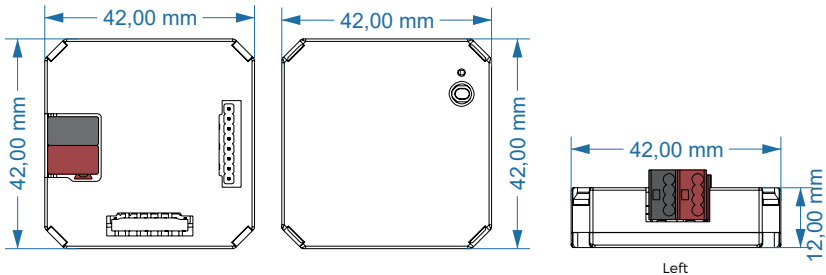

TECHNICAL DATA

Inputs	Product Detail	KNX Push Button Interface 4 Gang
Main Voltage		KNX Bus System
Inputs		8 Pos. 2.54mm Pin Header / Number 4
		Max. Cable lenght < 50m
Scanning Voltage		3.3V / Sensing Current = 0.1mA
Operations		Switch / Scene / Counter / Send Value / Shutter & Blind / Dimming
Operating Elements		Programming LED and button
Dimension / Weight		L:42mm W:42 mm H:12 mm / 22g with cables
Certification / Standarts		KNX Certified / EN50491